

AC Isolation Switch

EAS69 Series 690V 80A

Leading Manufacturer Protects Solar Power Safety

Rev3.0 2023/01/09



EAS69 Series AC Isolator 690V 80A






Features:

EAS69 isolation switch is widely used in industrial control machinery and various electrical appliances, and can effectively solve the problems of emergency disconnection, safety disconnection, machine control, motor control and so on.

- With alloy contacts, electrical special silver long life and high reliability.
- Small size, space–saving installation.
- · Construct a protective finger to make the operation safe.
- ${\cdot}$ With a variety of installation, ease of application of various purpose (panel mount, rail mount, sealed switch box type).
- · IP66 degree of protection
- Five years warranty

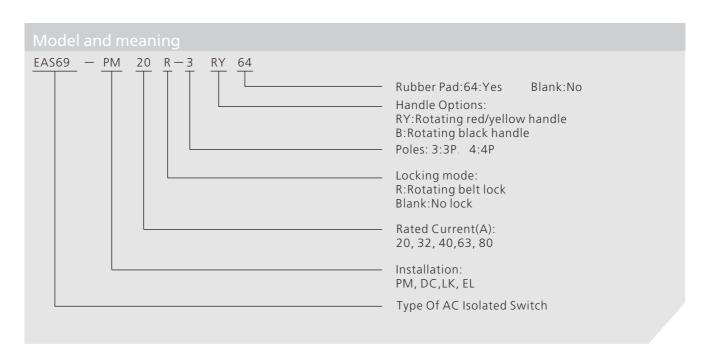

97



EAS69 Series AC Isolator 690V 80A















Current		20A	32A	40A	63A	80A
Type		EAS69-LK20-4RY	EAS69-LK32-4RY	EAS69-LK40-4RY	EAS69-LK63-3RY	EAS69-LK80-3RY
Rated carry current		20A	32A	40A	63A	80A
Rated operating current AC-23A		16A	25A	32A	45A	45A
Rated operating current AC-3		12A	23A	30A	37A	37A
Rated power control AC-23A	240V	4KW	7.5KW	9KW	15KW	15KW
	440V	7.5KW	12.5KW	16KW	22KW	22KW
Rated power control AC-3	240V	3KW	5.5KW	7.5KW	11KW	11KW
	440V	5.5KW	11KW	15KW	18.5KW	18.5KW
UL-CSA	240V	3KW	5KW	5KW	10KW	10KW
Motor load	440V	7.5KW	10KW	10KW	20KW	20KW
Rated short-time withstand current		250A	400A	500A	600A	850A
Cable		0.5-10MM ²			1-16MM ²	
Screw torque		0.8-1.7N • m			1.5-2N • m	
Rated insulation voltage		690V				


Dimension











4Poles 20-40A

3Poles 63-80A

screw hole